

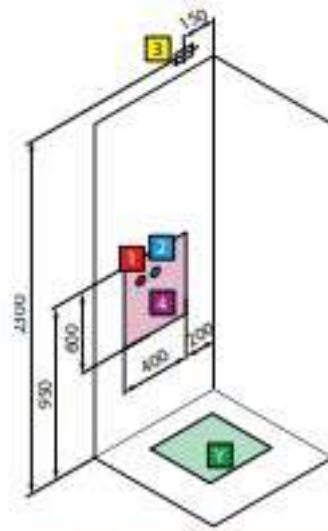



for model  
**GF/A88 - GF/A98 - G98 - R98**






left version  
for model **A100x80 - 2P120x80 - 2P120x90 - 2P128**

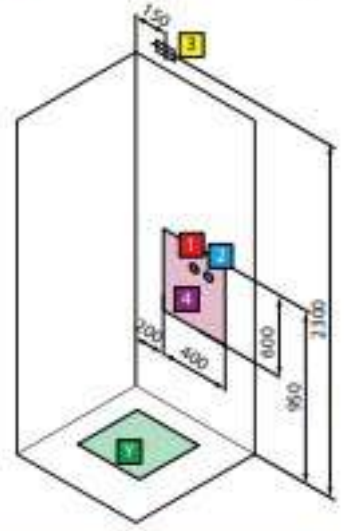


model	A ± 4	B ± 4	C	D	E
<b>GF/A88</b>	802	802	150	400	400
<b>GF/A98</b>	902	902	150	500	500
<b>G98</b>	902	902	150	500	500



model	A ± 4	B ± 4	C	D	E
<b>R98</b>	902 ± 4	902	156	500	500



model	A ± 4	B ± 4	C	D	E
<b>A100x80</b>	1002	802	150	600	400
<b>2P120x80</b>	1202	802	150	800	400
<b>2P120x90</b>	1202	902	150	800	500
<b>2P120x80/90</b>	1202	902	150	800	500

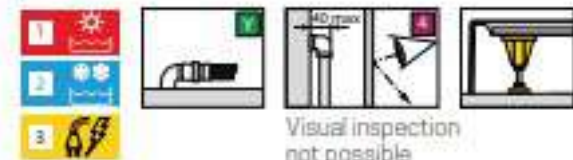

**HYDRAULIC CHARACTERISTICS:**  
Optimal dynamic pressure 2-5 bar  
Hot water 1/2"  
Cold water 1/2"  
Drain connection ø 48 mm

**ELECTRICAL CHARACTERISTIC:**  
Supply voltage: 220-230 V  
Frequency: 50/60 Hz  
Nominal power rating: 2500 W  
Maximum absorbed power  
HAMMAM: 2500 W  
BASE and DRD: 50 W

**WARNING!** Install a 30mA differential switch upstream of the appliance with a multiple-pole switch with a minimum contact opening > 3 mm.