

Linear gratings

AISI 304 electropolished stainless steel channel with matt finish.

AISI 304 chrome stainless steel grid, with different finishes.



Finishing



Texture



Texture chrome



Squared



Lines



Glass white



Glass black





Black


Technical data grating

Characteristics / grating frame	Testing method	Unit	Value
Height		mm	53
Vertical outlet		mm	85
Outlet diameter		mm	50H
Discharge speed	ISO TC 138/SC 1604	l/s	0.50
Load and deformation resistance	ISO TC 138		
GRATING Dimensions		cm	See references
Effects of chemical products	Clean with neutral products		
Composition	Drainage siphon: ABS Grating and cradle: AISI 304 stainless steel. Electro-polished finish.		

Grate

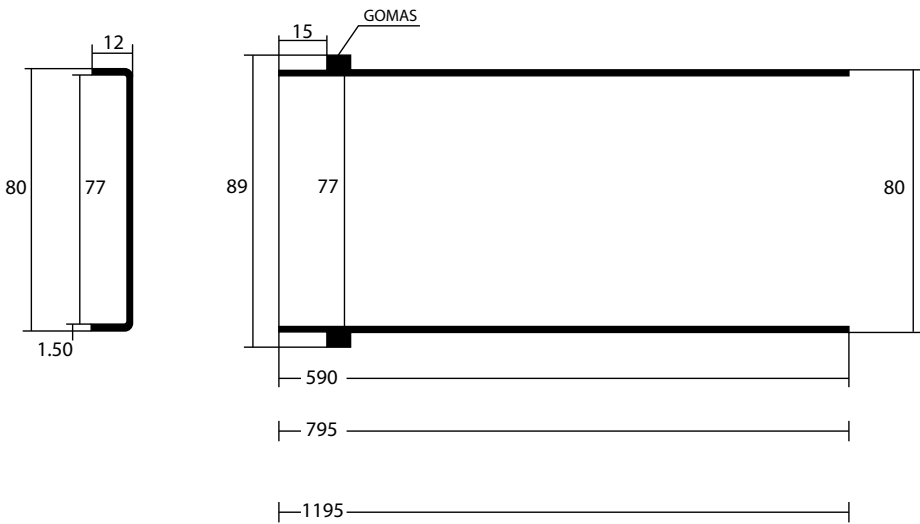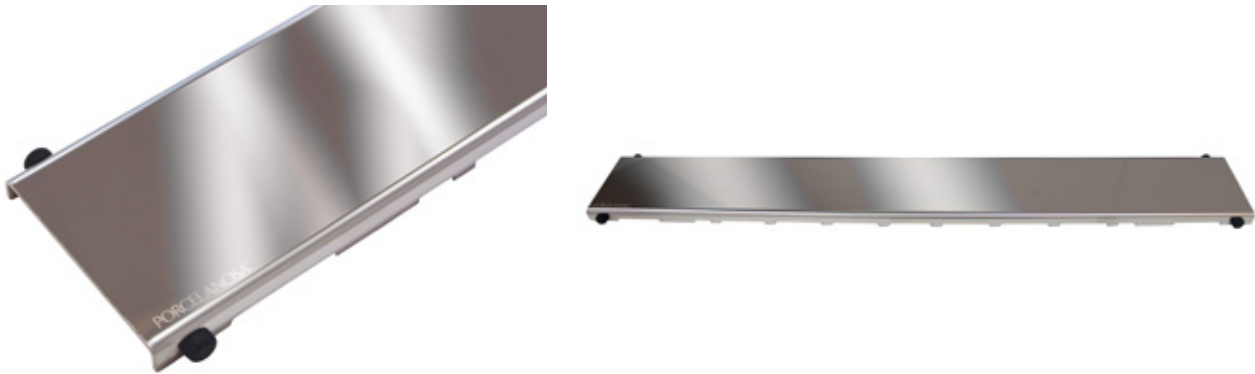

	Length
Linear grating 59,6	590 mm
Linear grating 80	795 mm
Linear grating 120	1195 mm

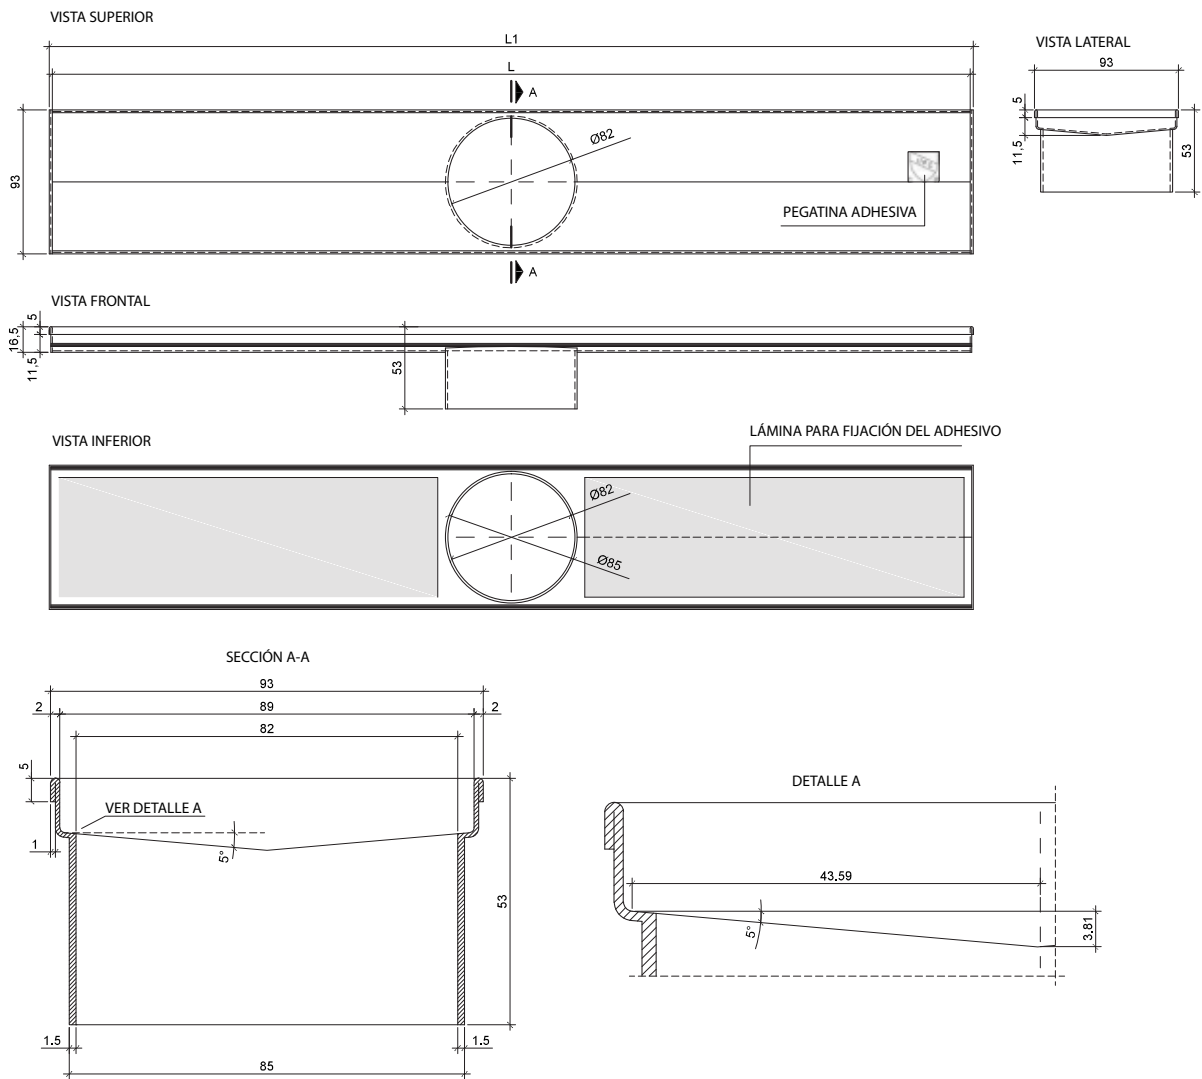

	Length L1	Length L
Linear channel 59,6	596 mm	591 mm
Linear channel 80	800 mm	795 mm
Linear channel 120	1200 mm	1195 mm

References

SAP	Product description	Packaging
* 100103364	120 x 9.3 cm linear chrome texture grating	1 grating/box
* 100103365	59.6 x 9.3 cm linear chrome texture grating	1 grating/box
* 100103366	80 x 9.3 cm linear chrome texture grating	1 grating/box
* 100103367	120 x 9.3 cm linear texture grating	1 grating/box
* 100103368	59.6 x 9.3 cm linear texture grating	1 grating/box
* 100103369	80 x 9.3 cm linear texture grating	1 grating/box
* 100103370	120 x 9.3 cm linear squared grating.	1 grating/box
* 100103371	59.6 x 9.3 cm linear squared grating.	1 grating/box
* 100103372	80 x 9.3 cm linear squared grating.	1 grating/box
* 100103373	120 x 9.3 cm line linear grating	1 grating/box
* 100103374	59.6 x 9.3 cm line linear grating	1 grating/box
* 100103375	80 x 9.3 cm line linear grating	1 grating/box
100141153	59.6 x 9.3 cm linear white glass grating	1 grating/box
100141156	59.6 x 9.3 cm linear black glass grating	1 grating/box
100278946	59.6 x 9.3 cm linear black grating	1 rejilla / caja

The mounting kit for the linear grating includes the metal base for anchoring the ceramic tile, adhesive putty for installing, and emery for smoothing out ceramic cuts.

* Grille supplied with a protective film. **DO NOT** remove until after construction cleaning.