


39 684 00D UNISSET SLIM ELEMENT FOR WC WITH FLUSHING CISTERN 88.9 MM



PRODUCT DESCRIPTION (1/2)

- cistern volume 6 l
- 2 WC fixing bolts
- inlet and outlet connecting set
- distance of fixing bolts 180/230 mm
- GROHE Water Saving - Less water, perfect flow
- angle valve 15 mm (½")
- for mounting of small flush plates revision shaft 40 949 000 to be ordered separately
- Shortable inspection shaft incl. protection during construction phase, for vertical use
- flushing cistern SLIM, 3 - 6 l, containing following features:
 - pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
 - for on-the-wall installation wall brackets 39 699 000 need to be ordered separately
 - water supply from top
 - optional flow manager please order separately

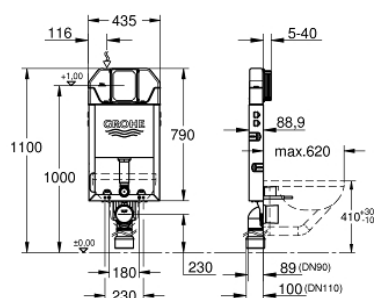

Pure Freude
an Wasser



39 684 00D **UNISET SLIM ELEMENT FOR WC WITH FLUSHING CISTERN 88.9 MM**

PRODUCT DESCRIPTION (2/2)

- adjustment ex factory 4.5 l and 3 l