### Bathroom Taps









### Description

Thermostatic concealed bath/shower mixer with 3 outlets. Thermostatic cartridge. Inlet connections 3/4", Outlet connections 1/2". Trim kit and Smart box body included. The flow rate at 3 bar is 20 l/min for both lateral outlets and 22 l/min for the upper outlet . Possibility to combine functions simultaneously. Trims for hand shower, rain and cascade buttons installed. Additionally it's included a central jet trim button interchangeable. It can be combined with 100243874, 100243838, 100284604 and 100243839 opening the aditional outlet at the bottom

#### Finish




chrome 100243873

TOUCH&FEEL

# Flow rate diagramme (±15%)


Pressure (bar)	1	2	3	4	5
A L/min	9	15.6	20.3	23.4	26.4
B L/min	10.2	18	22.2	26.4	29.4
C L/min	9	15	20	22.8	25.8

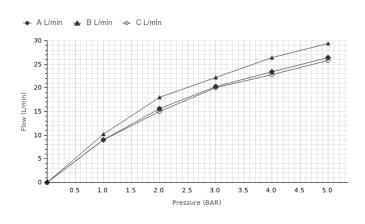

# Technical drawing



Dimensions in mm





Warranty:For a warranty or other information on this product, visit our Web address: www.noken.com

Legal disclaimer: All details provided by the NOKEN's Product has an information purpose without any contractual value. In order to obtain further information about the materials and their installation please visit our showrooms. NOKEN reserves the right to modify or delete any information on this site. The images and colours shown in this site may differ from the real ones.