

Ecostat Comfort S

Thermostat for concealed installation for 1 function

Finish: **Brushed Bronze** Article Number: **33714140**



Description

product features

- 1 function
- temperature and water flow control
- thermostat cartridge
- maximum flow rate at 1 bar: 12 l/min
- maximum flow rate at 3 bar: 21,3 l/min
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- volume control
- escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- Safety stop at 40 °C
- temperature limitation adjustable
- material handles: metal
- connection type: basic set iBox universal 2 (# 01500180)


Technology



Product image



Scale drawing

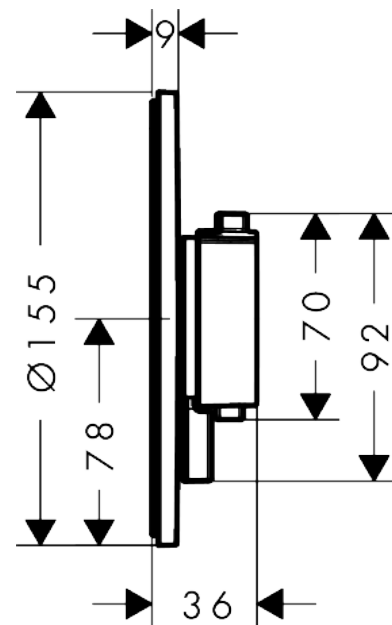

Ecostat Comfort S


Thermostat for concealed installation for 1 function

Finish: **Brushed Bronze**

Article Number: **33714140**



Flowchart




Ecostat Comfort S
Thermostat for concealed installation for 1 function
 Finish: **Brushed Bronze** Article Number: **33714140**



Exploded Drawing

Year of production: >04/25

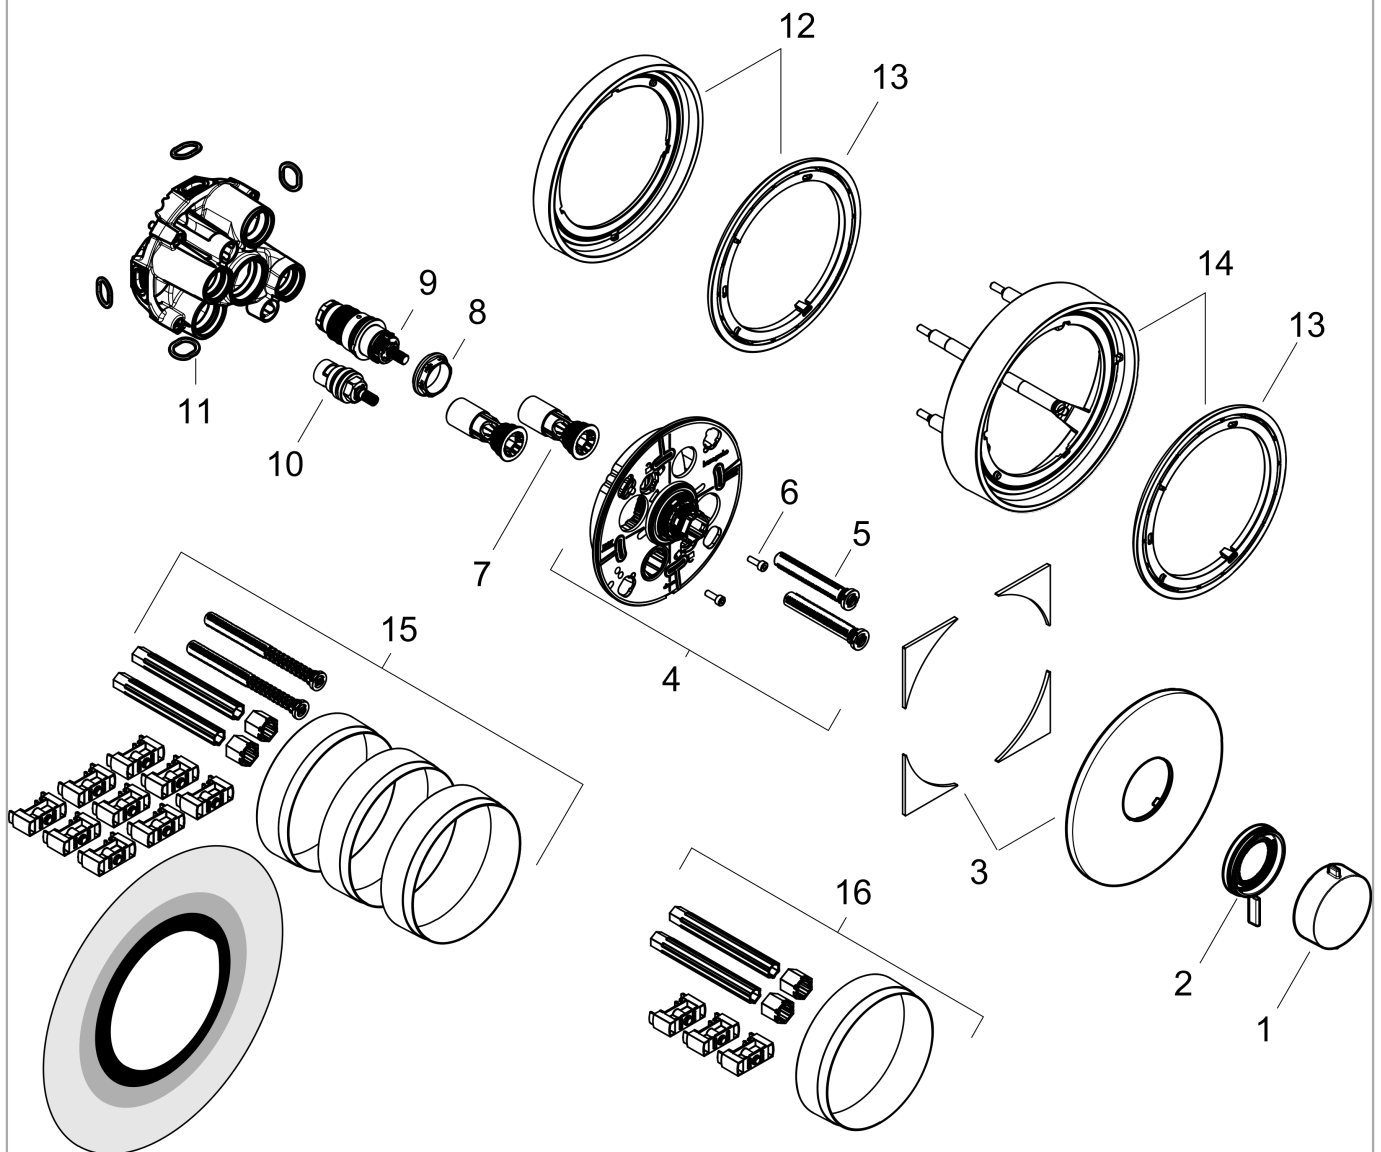

Ecostat Comfort S
Thermostat for concealed installation for 1 function
 Finish: **Brushed Bronze** Article Number: **33714140**



Spare part list

Year of production: >04/25

Pos.	Description	Article Number	PC	PU
1	handle for thermostat	85346140	0	1
2	-	98087140	56	1
3	escutcheon	98086140	61	1
4	sub plate	98081000	12	1
5	compensation set	94930000	3	1
6	hexagon socket screw M4x12	94929000	2	1
7	service unit	94928000	8	1
8	nut	98913000	6	1
9	thermostat cartridge	98282000	14	1
10	shut off unit right closing	94009000	9	1
11	O-ring 16x2,5	98134000	1	1
12	extension 5 mm	13614140	99	1
13	adapter for extension set	13631000	99	1
14	extension 22 mm	13624140	99	1
15	extension 25 - 75 mm	13632000	99	1
16	extension 25 mm	13638000	99	1
a	concealed item	01500180	99	1
b	set of adapters	13588000	99	1