



SPECIFICATIONS

Electronic dual-lever with All-in-One system

Inox brushed

180° swivel spout (adaptable 120 ° or 360 °)

Anti limescale aerator M 22 x 1

Ø 3/8" stainless steel flexible pipe

Colour LEDs to select the type of water to dispense (room temperature filtered water, carbonated chilled water, filtered water)

Separate dispensing channels for filtered water, carbonated filtered water and boiling filtered water

EC certified electronic All-in-One device

Chilled water temperature can be selected between 4°C and 10°C using the Nobili Sorgente app

Customisable degree of carbonation

Dispenses instant boiling water at 99 °C (up to 2.6 litres > 99 °C)

Dispenses up to 1.7 litres below 10°C

Chills by 10 °C up to 2.2 litres of water in 8 minutes (approximately)

GIOIA 5-stage filter with RFID* technology (maximum duration 1 year)

CO2 cylinder included in the set (compatible with all cylinders with M18 x 60 mm)

WiFi connectivity with the Nobili Sorgente App on Android and Apple

Maximum power rating 1800 W

Voltage 230 V (50 Hz)

For more information visit www.nobili.com

SALTORIGA


SALTORIGA

N.B.: variant with UK plug available with another product code


SALTORIGA

N.B.: minimum installation requirements L 30 x D 55 x H 49 cm (subject to change)

SALTORIGA

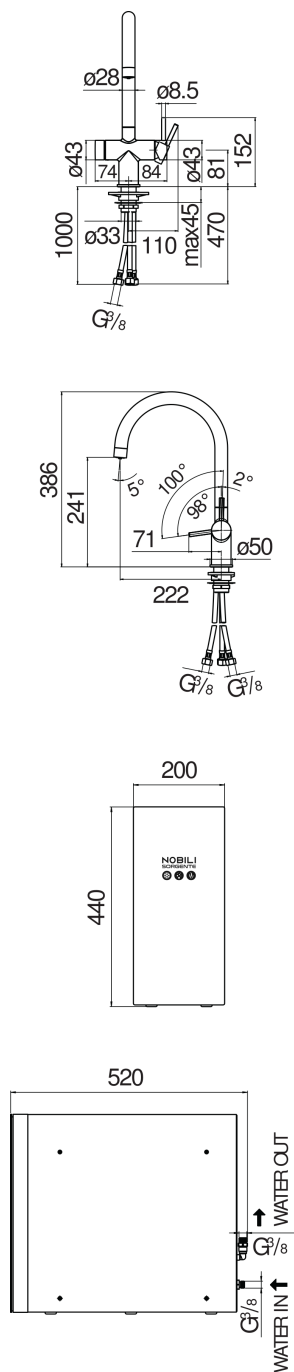

FLOW RATE DIAGRAM: HOT/COLD WATER

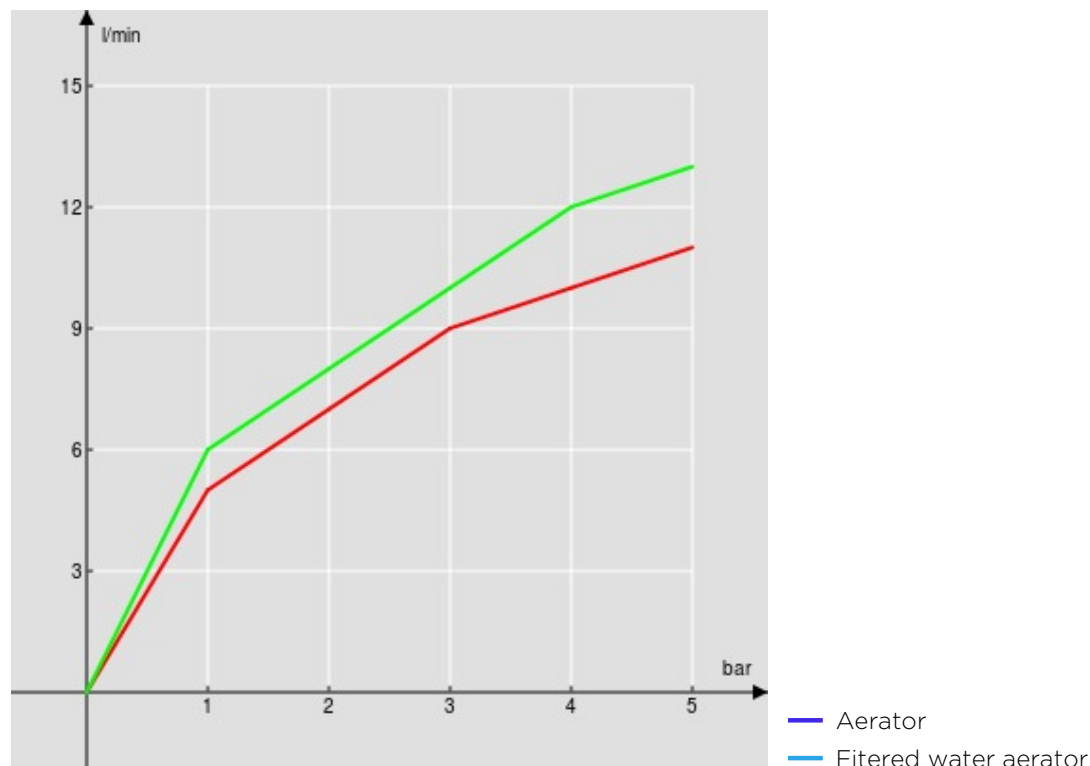

FLOW RATE DIAGRAM: MIXED WATER

