TAU cerámica

TECHNICAL FEATURES

TU.MT.BALISTONE EMERALD	
FORMAT	7x28 C.G.
THICKNESS	8.500
PRODUCT	PORCELANICO
TYPE	GL Esmaltado
GROUP	Bla

APPLICABLE STANDARD EN 14411 ANNEX G

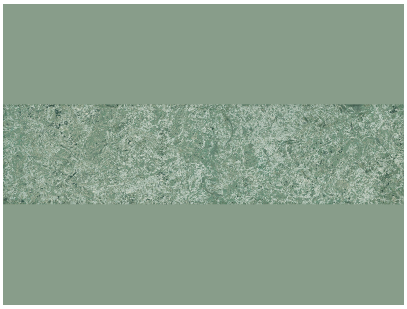

TESTS		RESULTS
UNE-EN ISO 10545-2 DIMENSIONAL FEATURES		COMPLIES WITH THE STANDARD
UNE-EN ISO 10545-3 WATER ABSORPTION		< = 0,5 %
UNE-EN ISO 10545-4 MODULUS OF RUPTURE	BREAKING STRENGTH	>700 N
	BENDING STRENGTH	35-45 N/mm2
UNE-EN ISO 10545-6 RESISTANCE TO DEEP ABRASION (MM3)		NOT APPLY
UNE-EN ISO 10545-7 RESISTANCE TO SURFACE ABRASION		-
UNE-EN ISO 10545-8 LINEAR THERMAL EXPANSION		<7,0 x 10-6 ºC-1
UNE-EN ISO 10545-9 THERMAL SHOCK RESISTANCE		RESISTS
UNE-EN ISO 10545-11 CRAZING RESISTANCE		RESISTS
UNE-EN ISO 10545-12 FROST RESISTANCE		RESISTS
UNE-EN ISO 10545-13 CHEMICAL RESISTANCE	AMMONIUM CHLORIDE 100 G/L	A
	SODIUM HYPOCHLORITE 20 MG/L	A
	HYDROCHLORIC ACID 3%	COMPLIES WITH THE STANDARD
	CITRIC ACID 100 G/L	COMPLIES WITH THE STANDARD
	POTASSIUM HYDROXYDE 30 G/L	COMPLIES WITH THE STANDARD
UNE-EN ISO 10545-14 STAIN RESISTANCE	GREEN AGENT IN LIGHT OIL	5
	IODINE SOLUTION IN ALCOHOL	5
	OLIVE OIL	5
UNE 41901:2017 EX SLIP RESISTANCE (PENDULUM)		-
DIN 51130 CRITICAL ANGLE OF SLIP (INCLINED PLATFORM)		-
DIN 51097 CRITICAL ANGLE OF SLIP. WET-LOADED BAREFOOT AREAS		-
(PTV) DRY CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) DRY		-
BS7976 (PTV) WET CLASSIFICATION ACCORDING TO PENDULUM TEST VALUES (PTV) WET		-
ANSI A326.3 DYNAMIC COEFFICIENT OF FRICTION (DCOF) OF RIGID FLOORS.		-

TAU CERAMICA SOLUTIONS, S.L.U. - R.M. de Castellón de la Plana. Tomo 1685, Libro 1246. Folio 208, Sección: 8, Hoja CS-38095.
Inscripción 3ª, Fecha 14/03/2016 - N.I.F. B12958112- V.A.T. - ESB12958112