



### Description

Thermostatic shower column with built-in wax thermoelement, spout, shower head, telescopic slide rail with slider hand shower bracket and hand shower. Connections of 1/2" and a distance of 150±15mm between them. It includes a non-return valve. The flow rate at 3 bar of the hand shower is 8,4 l/min, of the shower head 10,9 l/min and of the spout 23,5 l/min. Additional flow restrictors are included whose flow rates at 3 bars are 6l/min for the hand shower and 6.4l/min for the shower head.

### Finish




chrome  
100376816

### Flow rate diagramme (±15%)

Pressure (bar)	0.5	1	2	3	4	5
HANDSHOWER <6,6 L/MIN L/min	3.43	5.03	5.74	5.96	6.2	6.27
RAIN <12 L/MIN L/min	4.64	7.05	9.91	10.87	11.2	11.75
RAIN <6,6 L/MIN L/min	5.61	6.63	6.01	6.37	6.47	6.26
SPOUT L/min	9.04	12.97	19.02	23.47	27.19	29.9

◆ HANDSHOWER <6,6 L/MIN L/min ▲ RAIN <12 L/MIN L/min ⊕ RAIN <6,6 L/MIN L/min

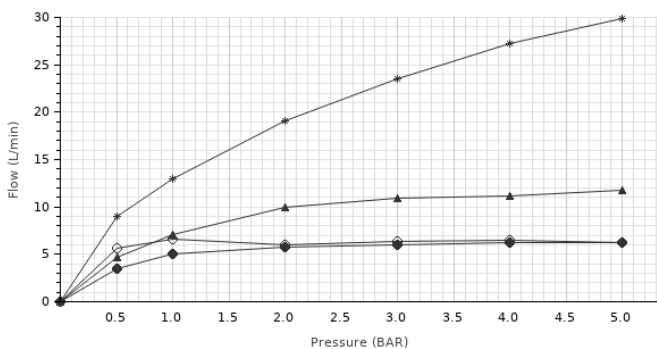

### Technical drawing

Dimensions in mm

